


TagMeter Yardmeter YMMI



YMMI Pre-Paid Domestic Yardmeter (Multi jet dry type)

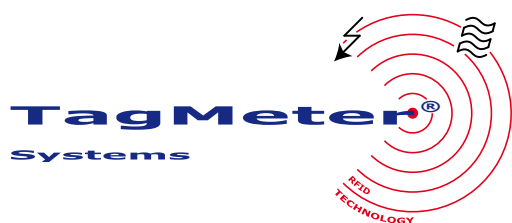

GENERAL INFO

- Extruded Anodized Aluminium Profiles: extremely strong, does not rust, very durable
- Top part with the electronics is made of Casted and Powder Coated Aluminium
- One LCD Display, 2 lines. Display protected against UV radiation
- ≥ 100 pulses per liter resolution
- Compact body: Meter and Valve are integrated and adapts to temperature changes
- Body is made of a technical plastics: Size adapts to the ambient temperature to prevent burst in freezing conditions
- Particles do not stick to the body and can not block the Multijet Turbine
- Controlled by Contactless Passive R.F. Transponder Tags
- Zoning, Emergency Credits
- Manual ball valve
- Easy to clean external strainer
- IP67

OPTIONS

- Hydro Generator: power the electronics using the water flow
- Deaerator: remove air from pipelines
- AMR/AMM using GSM/GPRS/SMS module
- Split Metering: Remote display/controller unit inside the house using a cable connection or our wireless Radio Frequency module

PERFORMANCE DATA

Nominal Flow	Q_3	(m ³ /h)	: 1.5
Maximum Flow	Q_4	(m ³ /h)	: 3.0
Transitional Flow	Q_2	(m ³ /h)	: 0.12
Minimum Flow	Q_1	(m ³ /h)	: 0.03
Pressure Class			: MAP10
Pressure Loss Meter	ΔP		: ≤ 0.63
Pressure Loss Meter + Valve	ΔP		: ≤ 1.0
Temperature Class			: T30
Metrological Class			: B
Pressure Loss	(bar)		: 0.6
Maximum Registration Capacity	(m ³)		: 99999
Smallest Reading Resolution	(m ³)		: 0.00005
Unit weight	(kg)		: ± 7.0

DIMENSIONS

- Height: 460 mm
- Width: 175 mm
- Depth: 175 mm



CONTACT

URL: <http://www.tagmeter.com>
Tel.: +31(0)165 55 33 60

E-mail: info@tagmeter.com
Fax: +31(0)165 55 14 80